


DELMONT

SALT AND MINERAL CHLORINATOR

FEATURES

- LOW SALT OPERATION: 3500-4000PPM (0.35%-0.4%)
- FRESHWATER/ULTRA LOW SALT: 1500PPM (0.15%) OPTION AVAILABLE IN ARC25LS AND ARC35 LS MODELS
- POWER SAVING TECHNOLOGY THAT INCORPORATES A BUILT IN SELF-REGULATOR FOR HIGH SALT, ALLOWING FOR GREATER EFFICIENCY
- SMART SELF-CLEANING CELL ELECTRODE WITH ADJUSTABLE CLEANING CYCLES
- PREMIUM GRADE QUICK CONNECT TITANIUM CELL FOR INCREASED LIFESPAN
- WATER FLOW, HIGH AND LOW SALT INDICATION
- INTERNAL OVER TEMPERATURE PROTECTION AND TRIP INDICATION
- ISOLATION TRANSFORMER DESIGN
- SUITABLE FOR ALL POOL SURFACES
- MODERN, COMPACT POWER PACK
- AUTOMATIC BATTERY BACK-UP TIMER, WITH SINGLE OR DUAL TIMER CYCLES
- ACRYLIC WEATHER SHIELD
- IP34 INGRESS PROTECTION

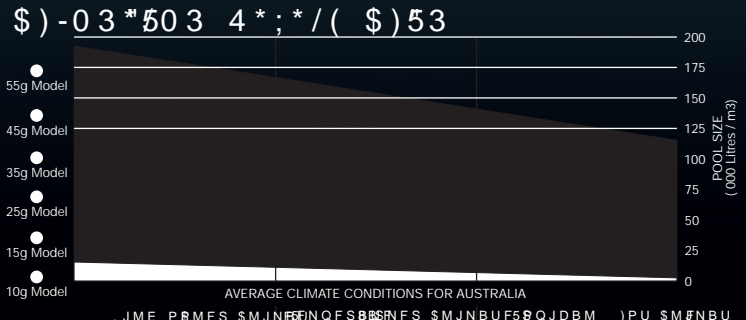

* Sizing chart provided as a guide only. Consult your local CAS dealer for the correct systems, size and specification to suit your needs.

4 1 & \$ * 5 * \$ 0 / 5 " # - &

.PEFM	1FS)PVS			1FS)PVST		
	\$IMPSJQ	\$BMZQP	4E ZQP	\$IMPSJQ	\$BMZQP	4E ZQP
" 3 \$	H	H	NM	H	H	NM
" 3 \$	H	H	NM	H	H	NM
" 3 \$	H	H	NM	H	H	NM
" 3 \$ -4	H	H	NM	H	H	NM
" 3 \$	H	H	NM	H	H	NM
" 3 \$ -4	H	H	NM	H	H	NM
" 3 \$	H	H	NM	H	H	NM
" 3 \$ -4	H	H	NM	H	H	NM
" 3 \$)%	H	H	NM	H	H	NM

HD model = 15,000hr material. ARC10-45 available in HD material, add HD after the above MODEL when ordering.

4 1 & \$ * 5 * \$ 0 / 5 " # - &

.PEFM	*OQVUOQ	VUOQVUOQ	VUOQVUOQ	VUOQVUOQ	VUOQVUOQ	VUOQVUOQ	VUOQVUOQ	VUOQVUOQ	VUOQVUOQ
	7PMUNQT	1XFS	7PMUNQT	VFOD	2FJHLH	1%JNFOTJ	POT	DN	
" 3 \$								-Y	8Y
" 3 \$								-Y	8Y
" 3 \$								-Y	8Y
" 3 \$ -4								-Y	8Y
" 3 \$								-Y	8Y
" 3 \$ -4								-Y	8Y
" 3 \$								-Y	8Y
" 3 \$ -4								-Y	8Y
" 3 \$)%								-Y	8Y

** - all readings taken at 230Vac and in optimum salt water ppm, with a water temperature of 26 C.

DELMONT

TEL: 021-8885-6060

EMAIL: delmontindonesia@gmail.com

www.delmontindonesia.com

Your Local Agent