

# DELMONT

## SALT AND MINERAL CHLORINATOR

### SIMPLY RELIABLE

SALT OR MINERAL  
COMPATIBLE

EFFICIENT CHLORINE  
PRODUCTION

LONG LIFE  
SELF-CLEANING CELL

SIMPLE SET UP AND  
OPERATION

QUICK CONNECT CELL

HORIZONTAL OR  
VERTICAL CELL  
INSTALLATION

CELL HOUSING WITH  
NATURAL GAS TRAP

EASY INSTALLATION  
TO NEW OR EXISTING  
POOLS



**1 YEAR** \*  
FULL WARRANTY

\* Domestic Installations Only


# DELMONT

## SALT AND MINERAL CHLORINATOR

### FEATURES

- **LOW SALT OPERATION:**  
3500-4000PPM (0.35%-0.4%)
- **FRESHWATER/ULTRA LOW SALT:**  
1500PPM (0.15%) OPTION AVAILABLE IN  
ARC25LS AND ARC35 LS MODELS
- **POWER SAVING TECHNOLOGY THAT  
INCORPORATES A BUILT IN SELF-  
REGULATOR FOR HIGH SALT, ALLOWING  
FOR GREATER EFFICIENCY**
- **SMART SELF-CLEANING CELL ELECTRODE  
WITH ADJUSTABLE CLEANING CYCLES**
- **PREMIUM GRADE QUICK CONNECT  
TITANIUM CELL FOR INCREASED LIFESPAN**
- **WATER FLOW, HIGH AND LOW  
SALT INDICATION**
- **INTERNAL OVER TEMPERATURE  
PROTECTION AND TRIP INDICATION**
- **ISOLATION TRANSFORMER DESIGN**
- **SUITABLE FOR ALL POOL SURFACES**
- **MODERN, COMPACT POWER PACK**
- **AUTOMATIC BATTERY BACK-UP TIMER,  
WITH SINGLE OR DUAL TIMER CYCLES**
- **ACRYLIC WEATHER SHIELD**
- **IP34 INGRESS PROTECTION**

### CHLORINATOR SIZING CHART

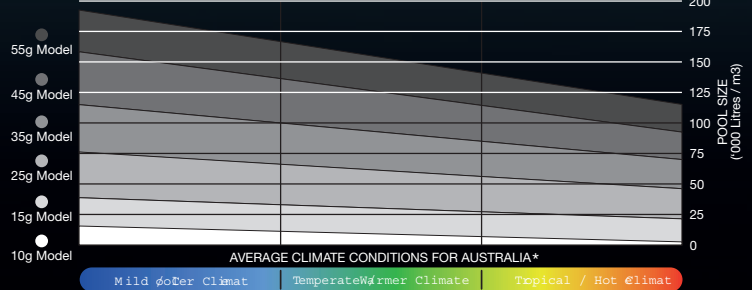

\* Sizing chart provided as a guide only. Consult your local CAS dealer for the correct systems, size and specification to suit your needs.

### CHLORINE PRODUCTION

Model	Per Hour			Per 8 Hours		
	Chlorine Output	Cal.ypo Equivalent (65%)	Sod. Hypo. Equivalent (12.5%)	Chlorine Output	Cal.ypo Equivalent (65%)	Sod. Hypo. Equivalent (12.5%)
ARC10	10g	15g	80ml	80g	124g	640ml
ARC15	15g	23g	120ml	120g	184g	960ml
ARC25	25g	38g	200ml	200g	304g	1600ml
ARC25LS	25g	38g	200ml	200g	304g	1600ml
ARC35	35g	54g	280ml	280g	432g	2240ml
ARC35LS	35g	54g	280ml	280g	432g	2240ml
ARC45	45g	69g	360ml	360g	552g	2880ml
ARC55HD	55g	85g	440ml	440g	680g	3520ml

HD model = 15,000hr material. ARC10-45 available in HD material, add HD after the above MODEL when ordering.

### SPECIFICATION TABLE

Model	Input Volts (Vac)	Input Amps** (Aac)	Input Power (Watts)	Output Volts (Vdc)	Output Amps** (Adc)	Freq- uency (Hz)	Weight (kg)	Dimensions (cm)
ARC10	220-240	0.36	79	25.0	1.8-2.1	150/60	6.05	36Lx33Wx19H
ARC15	220-240	0.53	120	25.0	2.8-3.2	250/60	6.20	36Lx33Wx19H
ARC25	220-240	0.70	157	25.0	3.8-4.2	250/60	6.25	36Lx33Wx19H
ARC25LS	220-240	0.70	157	25.0	3.8-4.2	250/60	6.50	36Lx33Wx19H
ARC35	220-240	0.86	192	25.0	4.8-5.2	250/60	7.30	36Lx33Wx19H
ARC35LS	220-240	0.86	192	25.0	4.8-5.2	250/60	7.55	36Lx33Wx19H
ARC45	220-240	1.04	234	25.0	5.8-6.2	250/60	7.40	36Lx33Wx19H
ARC55HD	220-240	1.24	272	25.0	6.8-7.2	250/60	7.50	36Lx33Wx19H

\*\* - all readings taken at 230Vac and in optimum salt water ppm, with a water temperature of 26°C.

**DELMONT**

TEL: 021-8885-6060

EMAIL: [delmont.indonesia@gmail.com](mailto:delmont.indonesia@gmail.com)

[www.delmontindonesia.com](http://www.delmontindonesia.com)

Your Local Agent