

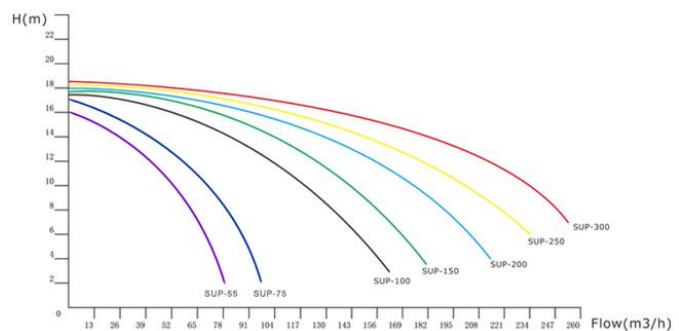


SUPREME SERIES COMMERCIAL SELF-PRIMING PLASTIC POOL PUMP

Delmont SUPREME pump is built to be efficient, durable and reliable. It adopts the bionic turbo pump body design, maximizing the conversion of motor efficiency to deliver massive and smooth flow. Thickening body and spiral lock design, excellent bearing pressure performance, sturdy and durable. Using four-pole motor, RPM 1450, NSK imported bearing, carborundum & graphite mechanical seal, creating a stable and quiet motor. IP55 protection grade, F insulation grade, rainproof standard resist corrosion, flange type inlet & outlet for easy installation and maintenance. Suitable for large waterparks and large swimming pools.

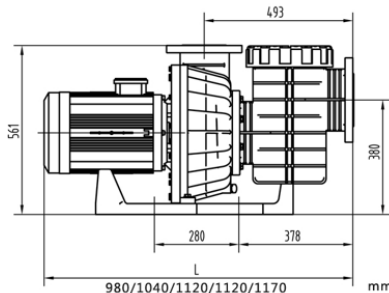

- Designed for high performance and long wearing application with anti-rust body
- Less power use, high head, high flow
- Safe and durable high reinforced plastic body
- Large basket strainer to load much more dirt before cleaning



CODE	DESCRIPTION	INLET (mm)	OUTLET (mm)	HEAD (m)	FLOW RATE (m³/h)	RPM
DPM00055	5.5 HP Three Phase	100	80	16	80	1450
DPM00056	7.5 HP Three Phase	100	80	17	95	1450
DPM00057	10 HP Three Phase	150	125	18	170	1450
DPM00058	15 HP Three Phase	150	125	18	185	1450
DPM00059	20 HP Three Phase	150	125	18	220	1450
DPM00060	25 HP Three Phase	150	125	18	240	1450
DPM00061	30 HP Three Phase	150	125	18	260	1450