


C SERIES FIBERGLASS COMMERCIAL SAND FILTER

Delmont sand filter is all about strength and reliability. The filter tank is made of high-quality fiberglass and resin with a high-pressure capability. The tank is UV resistance on the surface and the whole filter has a good resistance to chemical and sunlight. The multiport valve is mounted on the side for easy reach. The maximum working pressure is 36 psi or 2.5 bar. The maximum working temperature is 43° Celsius or 109° Fahrenheit.



- ✚ Designed for high performance and long wearing application
- ✚ Exceptionally clear water quality
- ✚ Easy to maintain, clean and use
- ✚ Inner component materials are made of the latest generation of plastic resin

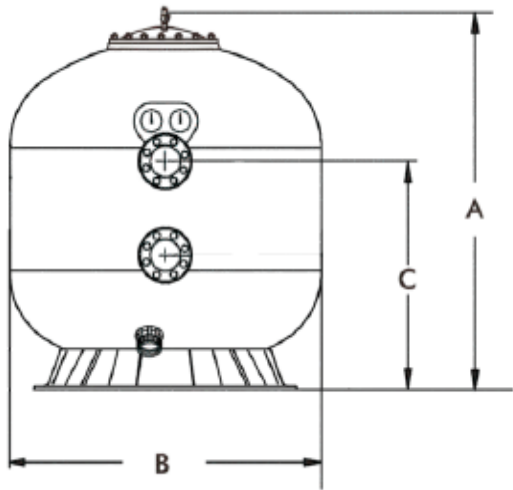

CV-6" BUTTERFLY VALVE ASSEMBLED WITH PIPES



CODE	DESCRIPTION	PORT	FLOW RATE (m/h)	POOL VOL. (m/8hr)	SAND (TOP) 0.5-0.8 mm	SAND (BOTTOM) 1-2 mm	A (MM)	B (MM)	C (MM)
DFL00041	1200mm (48")	3"	52	416	900	300	1450	1200	900
DFL00042	1400mm (56")	4"	69	552	1350	450	1650	1400	1000
DFL00043	1600mm (64")	4"	80	640	2300	700	1800	1600	1100
DFL00044	1800mm (72")	6"	125	1000	2900	900	1900	1800	1300
DFL00045	2000mm (80")	6"	157	1256	4000	1100	2150	2000	1350
DFL00046	2300mm (92")	8"	217	1736	6000	1600	2350	2300	1500