



## W SERIES BOBBIN TOP MOUNT SAND FILTER

Delmont sand filter is all about strength and reliability. The filter tank is made of high-quality fiberglass and resin with a high-pressure capability. The outer layer is continuously wound with fiberglass strands to create a high strength vessel. The tank is UV resistance on the surface and the whole filter has a good resistance to chemical and sunlight. The multiport valve is fixed with a clamp system that is easy to remove and quickly locks in place (for filter under 800mm diameter)

and bolts system for bigger size filter diameter 800 – 900 mm to ensure maximum strength and durability. The maximum working pressure is 36 psi or 2.5 bar. The maximum working temperature is 43° Celsius or 109° Fahrenheit.

- ✚ Designed for high performance and long wearing application
- ✚ Exceptionally clear water quality
- ✚ Easy to maintain, clean and use
- ✚ Inner component materials are made of the latest generation of plastic resin

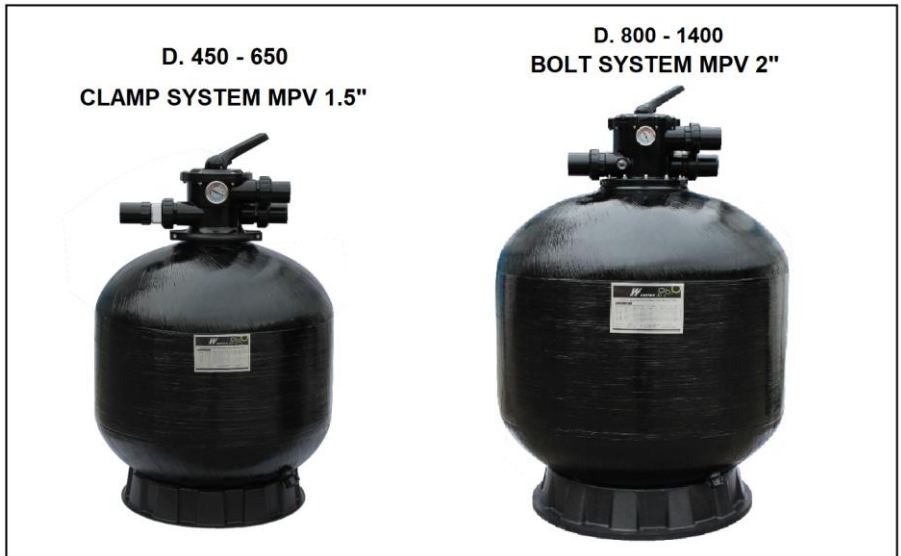

CODE	DESCRIPTION	PORT	FLOW RATE (m/h)	POOL VOL. (m/8hr)	SAND (KG)	A (MM)	B (MM)	C (MM)	D (MM)	E (MM)	F (MM)
DFL00021	450mm (18")	1.5"	8.1	64.8	45	770	610	550	210	460	390
DFL00022	550mm (21")	1.5"	11.1	88.8	85	830	720	660	235	530	390
DFL00023	650mm (25")	1.5"	15.6	124.8	145	980	820	760	300	640	500
DFL00025	800mm (32")	2"	24.9	199.2	355	1200	1020	950	425	800	710
DFL00026	900mm (36")	2"	31.2	249.6	470	1310	1160	1080	480	900	710
DFL00027	1000mm (40")	2"	39.0	312.0	620	1410	1250	1160	580	1000	710
DFL00028	1100mm (44")	2"	42.0	336.0	700	1500	1330	1250	630	1100	890
DFL00029	1200mm (48")	2"	51.6	412.8	860	1590	1390	1300	740	1200	890
DFL00030	1400mm (56")	2"	57.0	456.0	1400	1800	1600	1510	850	1400	1200