

STA-RITE®

SAND FILTERS

SR-S SIDE MOUNT SAND FILTERS



PRODUCT FEATURES:

- Bobbin-Wound Fiberglass Tank.
- UV-Resistant.
- Sizes SR-S filters from 450mm to 1200mm.
- Max. Operating Pressure: 2.5bar (36psi).
- Max Temperature of 43 °C (109 °F).
- Suggested Size of Media: 0.5-0.8mm.




SR-S SIDE MOUNT SAND FILTERS


Six-position Hi-Flow™ Valve provides easy control of all filter functions:

- Filter
- Backwash
- Rinse
- Waste
- Closed
- Recirculate


One-piece fiberglass-reinforced tank with UV-resistant surface finish for years of service and exceptional strength



SR-S450-15 ~ SR-S700-15



SR-S700-20 ~ SR-S900-25

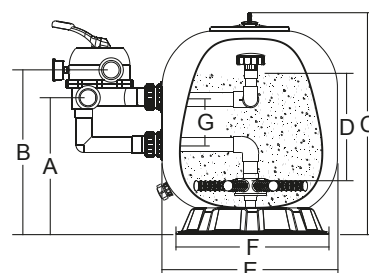

SR-S1000-20 ~ SR-S1200-25

Product Model	Filter Area	Valve Connections		Flow rate		Sand	Product Dimensions						
	m ²	inch	mm	lpm	m ³ /h	Kg	A mm	B mm	C mm	D mm	E mm	F mm	G mm
SR-S450-15	0.16	1.5	50	135	8.1	45	360	420	730	210	455	390	125
SR-S500-15	0.22	1.5	50	185	11.1	85	390	450	770	235	535	500	125
SR-S650-15	0.32	1.5	50	260	15.6	145	430	490	850	300	635	500	125
SR-S700-15	0.40	1.5	50	325	19.5	210	450	510	960	330	710	500	125
SR-S700-20	0.41	2.0	63	336	20.16	215	520	606	890	390	723	500	220
SR-S800-20	0.53	2.0	63	435	24.1	355	560	646	1050	425	820	780	220
SR-S900-20	0.66	2.0	63	495	29.7	470	610	696	1180	480	920	780	220
SR-S900-25	0.66	2.5	75	550	33	470	673	744	1180	380	920	780	236
SR-S1000-20	0.82	2.0	63	670	40.2	620	700	770	1220	580	1020	780	220
SR-S1000-25	0.82	2.5	75	683	41	620	773	844	1220	480	1020	780	236
SR-S1200-20	1.17	2.0	63	880	52.8	860	820	1005	1410	740	1220	1000	220
SR-S1200-25	1.17	2.5	75	975	58.5	860	836	1079	1410	640	1220	1000	236



Simply Smarter.

21F Cloud Nine Plaza, No.1118, West Yan An Road, Shanghai, China 200052
+86 21 3211 4588

390 Havelock Road, #04-01 King's Center, Singapore 169662
+65 6768 5800

33/4 The Ninth Towers Grand RAMA 9, Tower A, Floor 33, Unit TNA01, Rama 9 Road, Huaykwang, Bangkok 10310
+66 2203 6888

5th Floor, Wisma 77 Jl. Letjend S. Parman Kav. 77, Slipi Jakarta, Indonesia - 11410
+62 21 5367 0111

Dealer:

All Pentair trademarks and logos are owned by Pentair, Inc. Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice. Pentair is an equal opportunity employer.